

TM12

VERTICAL MAST LIFT



- Industry-leading self-propelled telescopic mast lift
- Versatile, robust and simple to use
- Drives through a standard doorway
- 0.5m roll-out extension deck
- Ideal for many applications – from construction to stockpicking!

 **snorkel**
www.snorkellifts.com

VERTICAL MAST LIFT

TM12



DIMENSIONS	TM12
Max. working height	5.6m
Max. platform height (A)	3.6m
Platform size (stowed)	0.74m x 0.96m
Platform size (extended) (E)	0.74m x 1.46m
Extension deck length	0.5m
Overall width (B)	0.76m
Overall length (D)	1.39m
Stowed height (C)	1.65m
Ground clearance	66mm

PERFORMANCE	
Platform capacity (SWL)	227kg
Max. drive height	3.6m
Max. drive speed (stowed)	3.2km/h
Max. drive speed (elevated)	0.43km/h
Raise/lower time	16/19 sec
Gradeability	25%
Max. operating slope (side to side)	1.5°
Max. operating slope (front to back)	2°
Inside turning radius	0.43m
Outside turning radius	1.53m
Tyres	305mm. dia. solid rubber, non-marking
Parking brake	2 wheel, spring-applied, hydraulically-released with manual overdrive
Drive system	dual front hydraulic motors
Controls	proportional

POWER	
Power source	24V 4hp DC electric motor 4-220 Ah batteries
Battery charger	90V - 240V - 18 amp automatic

WEIGHT	
Weight	830kg

TURNING RADIUS

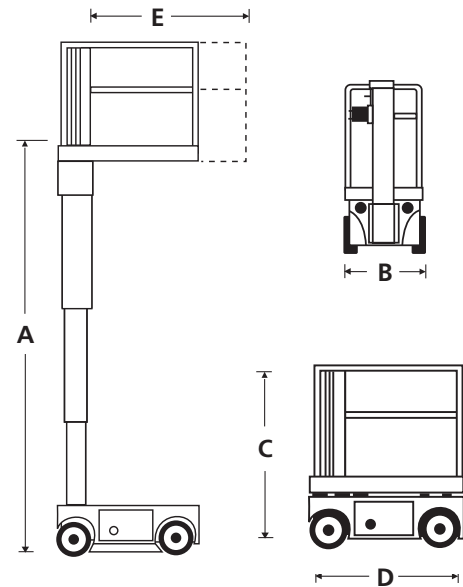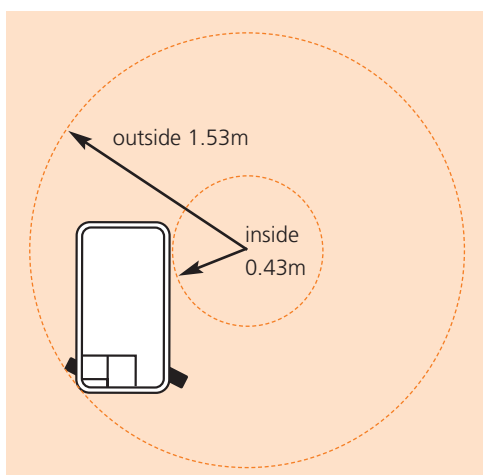

STANDARD FEATURES

- 0.5m roll-out extension deck (113kg capacity)
- Hydraulically powered descent
- Proportional controls
- Descent and tilt alarms
- High amp hour rating gives long usage between charges
- Emergency lowering at chassis controls
- Non-marking, solid rubber tyres
- Forklift pockets
- Saloon door-style platform entry
- Horn
- Tie down points
- 2 persons + equipment capacity indoors
- 1 person + equipment capacity outdoors
- Selectable motion alarm
- CE approved

OPTIONS

- Special paint colours
- Environmental green oil
- No extension deck

snorkel www.snorkellifts.com

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057

e: sales@snorkellifts.com