

Range T

Cod. PRP1612

## Description:


Telescopic platform with high specifications of strength, reliability and easy maintenance. Specifically designed to fulfill the high standard of quality requested by professional users, ensuring a long working life and a high residual value.

## Performances

Working height mt.		19.98
Max load in the basket kg.	⚡   ⚡   ⚡	250   80
Max working outreach mt.	⚡   ⚡   ⚡	9.00   13.20
Turret rotation °		450
Hose track		Internal
Controls in the basket		Electrohydraulic with joystick

## Platform specifications

Metal basket dimensions mt.	1.40x0.70
Fiberglass basket dimensions mt.	1.20x0.70
Basket rotation °	70 + 70
Front outriggers	Extendible
Back outriggers	Vertical
Foot plate gauge min. mt.	3.12

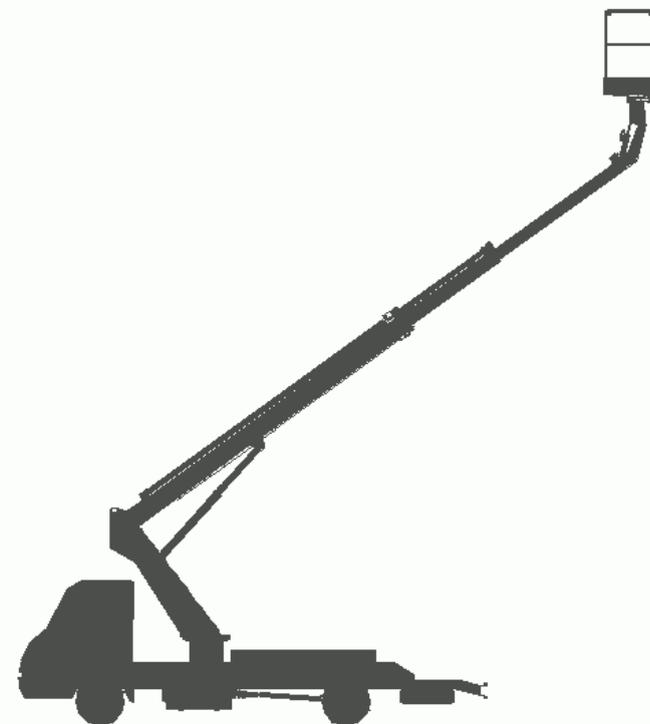

## Assembling

This assembly represents the top version with a very comfortable variable stabilization (wide, narrow and one side) even on delicate flooring. outriggers are placed slightly outside the mirror width and ensure the best ratio between foot-print on ground and working outreach.

**Deck** Anti-slip aluminium deck

**Body** Purposely designed assembly to optimize functionality and utilization

**Standards** Declaration of Conformity

**Accessories** There are available a wide range of accessories, many of them are already included as standard machine. It is recommended to contact our sales network for more information.

**Other types of assembling and different vehicles** We are in position to propose the same machine with different type of assembly and / or on different types of vehicles. Contact our sales organization to obtain information about all the possible solutions that we are able to offer.









Via Lea Giaccaglia 5 – 47924 Rimini (RN) Italy  
Tel. +39 0541 397811 Fax +39 0541 384491  
sales@gsrspa.it - www.gsrspa.it

Company with Quality Management System Certified by DNV - ISO 9001:2008

Dati indicativi soggetti a modifica senza preavviso - Subject to modifications without prior note.

B200T1612R0 / GB

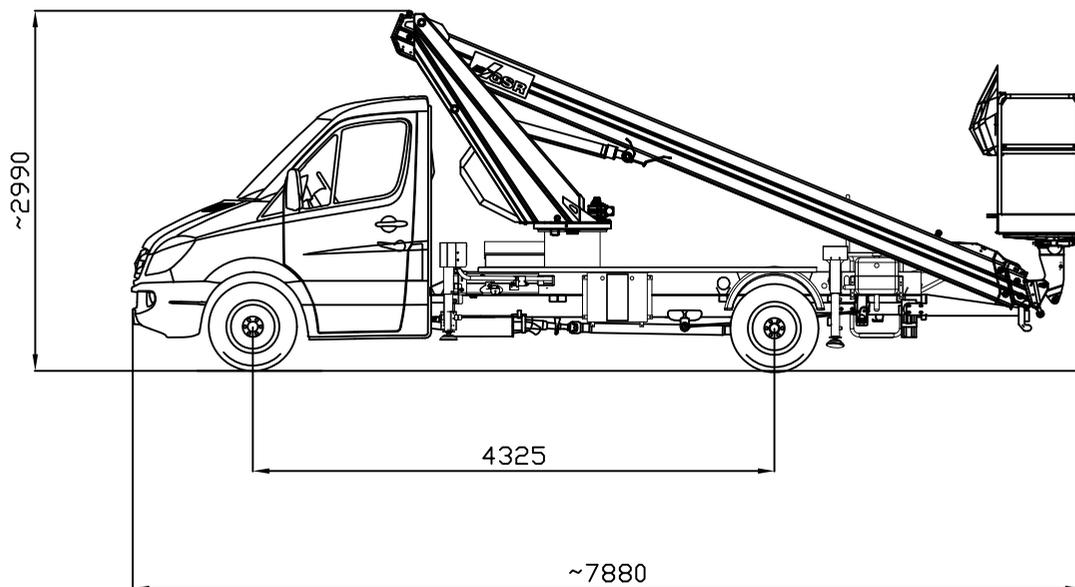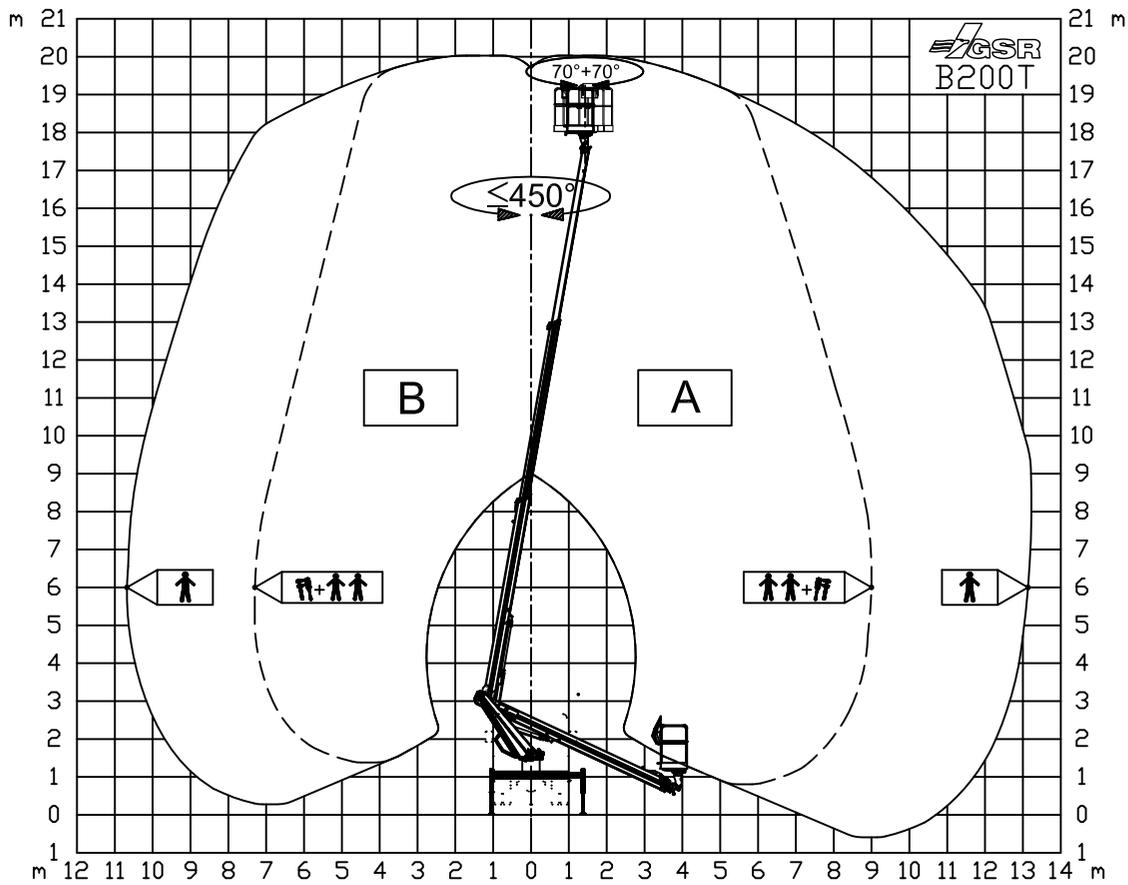

MAX SAFE WORKING LOAD	 250 KG
MAX NENNTRAGFAHIGKKEIT IM KORB	
MAX CHARGE NOMINALE DANS LE PANIER	
MAX PORTATA NOMINALE IN NAVICELLA	
ALUMINIUM BASKET	



DENOMINAZIONE  
**B200T Comfort XEV**  
 MERCEDES 311CDI - 3.5 t

DATE 17-03-2017  
 CODE PRP1612

APPROXIMATE DATA - TECNICHE AENDERINGEN VORBEHALTEN

DONNES INDICATIVES - DATI INDICATIVI

Aggiornamenti - Modifiche:

C	F
B	E
A	D